
High Brightness 3W High Power Green LED

Features

- Highest flux per LED family in the world
- Very long operating life (up to 100k hours)
- Available in Green
- Lambertian radiation pattern
- More energy efficient than incandescent and most halogen lamps
- Low voltage DC operated
- Cool beam, safe to the touch
- Fully dimmable
- No UV
- Superior ESD protection
- lower Rth
- RoHS compliant — Lead-free
- Instant light (less than 100ns)

Applications

- Portable (flashlight, bicycle)
- Reading lights (car, bus, aircraft)
- Orientation
- Mini-accent
- Decorative
- Fiber optic alternative
- Appliance
- Sign and channel letter
- Architectural detail
- Cove lighting
- Automotive exterior (Stop-Tail-Turn,CHMSL,Mirror side repeat)
- Edge lit signs (Exit, point of sale)

1. High Brightness 3W High Power Green LED

PART NO	Chip		Lens Color
	Material	Emitted Color	
LED-P3-DH-Green	InGaN	Green ■	WATER CLEAR

Absolute Maximum Ratings (Ta = 25°C)

Items	Symbol	Absolute Maximum Rating	Unit
Forward Current	IF	0.7	A
Peak Forward Current*	IFP	0.8	A
Reverse Voltage	VR	5	V
Power Dissipation	PD	3	W
Electrostatic discharge	ESD	±2000	V
Operation Temperature	TOPR	-40~+80	°C
Storage Temperature	TSTG	-40~+100	°C
Lead Soldering Temperature*	TSOL	Max. 260°C for 3sec Max.	

*IFP Conditions: Pulse Width≤10msec duty≤1/10

* Our MCPCB is usual use for installation and connection during application, but the ability of heat dissipation is not enough. If lighted, our high power stars will need better another type heat dissipation equipment. So we recommend the working time is not over 5 -10 seconds without any heat dissipation equipment.

*Reflow, wave peak and soakstannum soldering etc. is not suitable for this products.

*Suggest to solder it by professional high power LED soldering machine.

*Can use in variable temperature searing iron with soldering condition :≤260 degree less than 3 seconds.

Typical Electrical & Optical Characteristics (Ta = 25°C)






Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	VF	IF=0.7A	3.0		3.8	V
Reverse Current	IR	VR=5V			50	uA
50% Power Angle	2θ1/2	IF=0.7A	110		140	deg
Luminous Intensity	φV	IF=0.7A	140		180	lm
Recommend Forward Current	IF			0.7		A
Wave Length	λd	IF=0.7A	520		530	nm

Notes:1.Tolerance of measurement of forward voltage ±0.1V.



2.Tolerance of measurement of peak Wavelength ±2.0nm.

3.Tolerance of measurement of luminous intensity ±15%.


Typical Electrical/Optical Characteristics Curves (Ta=25° Unless Otherwise Noted)

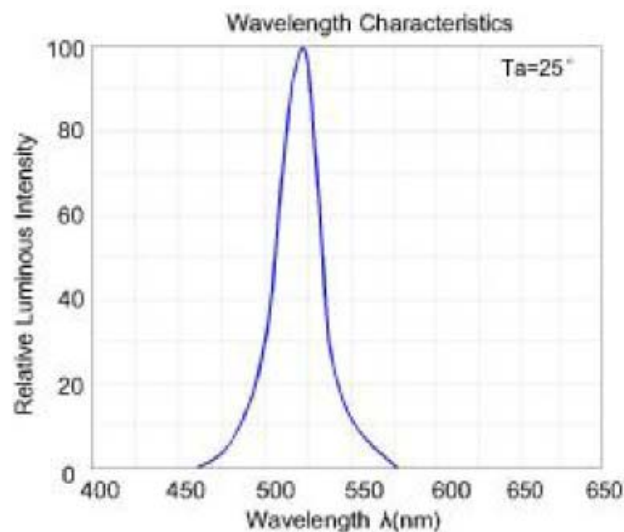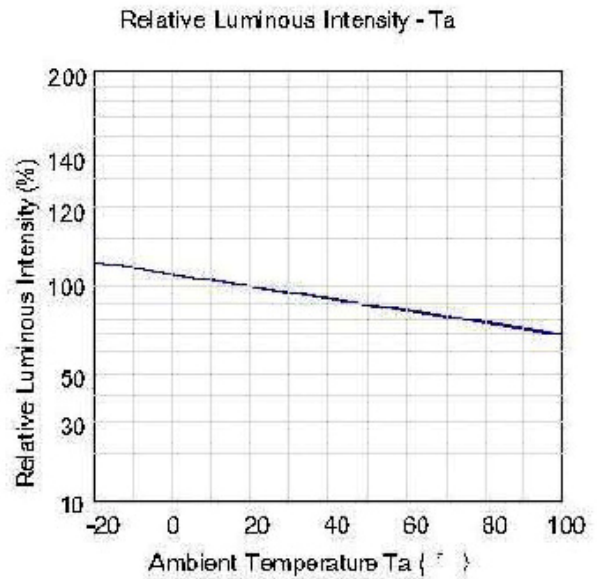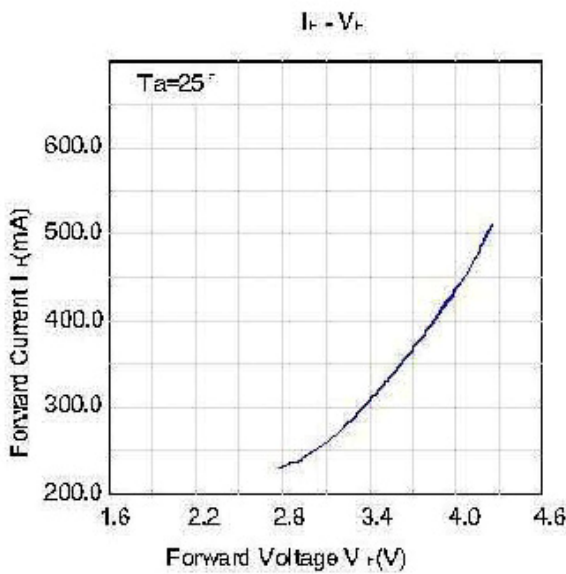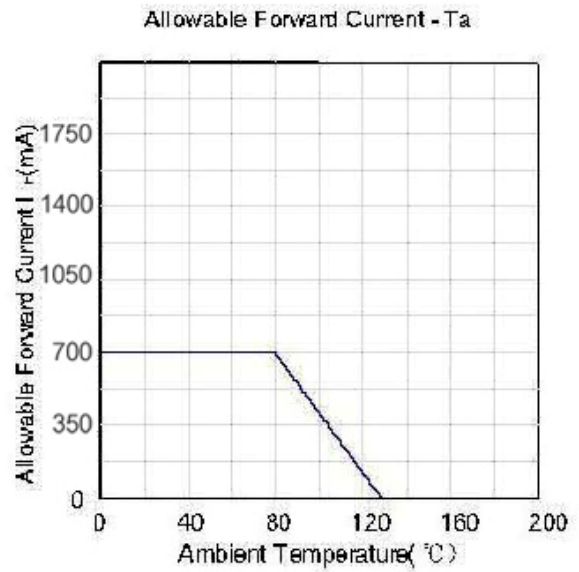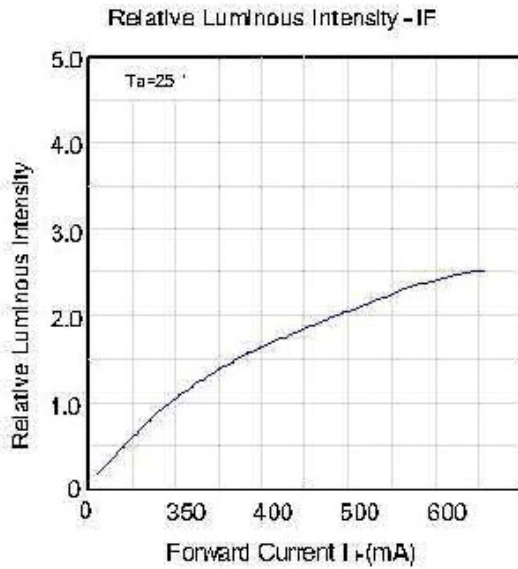

Radiation Pattern

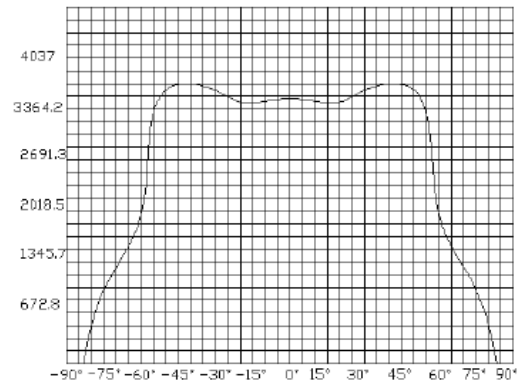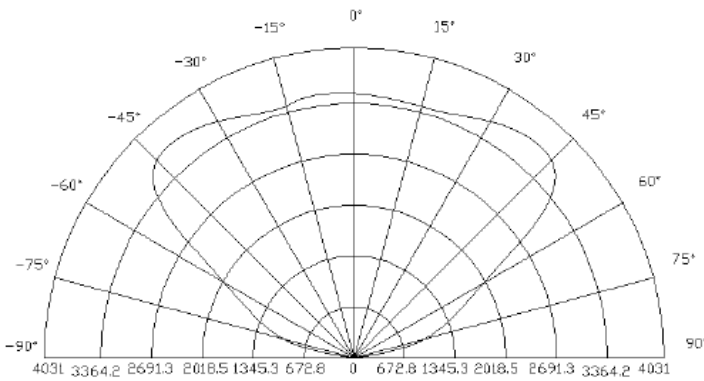

Package Dimensions (unit:mm)

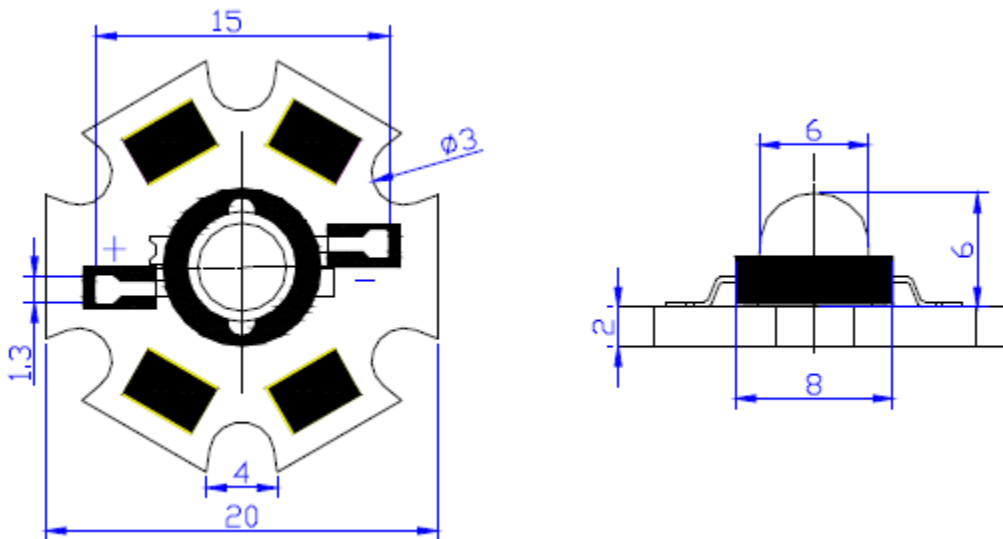

Notes:

All dimensions in mm tolerance is $\pm 0.2\text{mm}$ unless otherwise noted.

Copyright

Copyright 2009, by ShenZhen Wayjun Technology Co.,Ltd. All rights are reserved. ShenZhen Wayjun Technology Co.,Ltd reserves the right to make improvements to the products described in this manual at any time without notice.

Trademark

The names used for identification only may be registered trademarks of their respective companies.