

# LED-155-1 Down Light

## Features

- Long life
- Energy efficiency
- Improved visibility
- Instant ON/no restrike
- Ease of installation

## Applications


- Down light
- Ceiling light
- Office lighting
- Department store
- Factory lighting



## Typical Electrical & Optical Characteristics ( Ta = 25℃)

Item	LED-155
AC Power	100V~240V
Total Power Consumption	15.5W
Frequency	50Hz~60Hz
LED Power Consumption	12W
Central Illumination (Height = 1M)	≧ 238Lux
Effective Illuminating Range (Height = 3M)	6M
Lighting Flux	> 770LM
Illuminating Angle	170°
Operating Temperature	- 30℃~50℃
Life Time	≧ 30,000hrs
Operating Humidity	10%~90%
Runtime Temperature (Ambient=25℃)	56℃~62℃
Mechanical Material	Aluminum Extrusion and LGP(Light Guide Plate)
Weight	0.41Kg
International Protection	IP30
Available LED Color Temperature	4100 / 6400K
Product Color	W:White/B:Black/G:Golden/N:Nickelic

**Package Dimensions (unit:mm)**

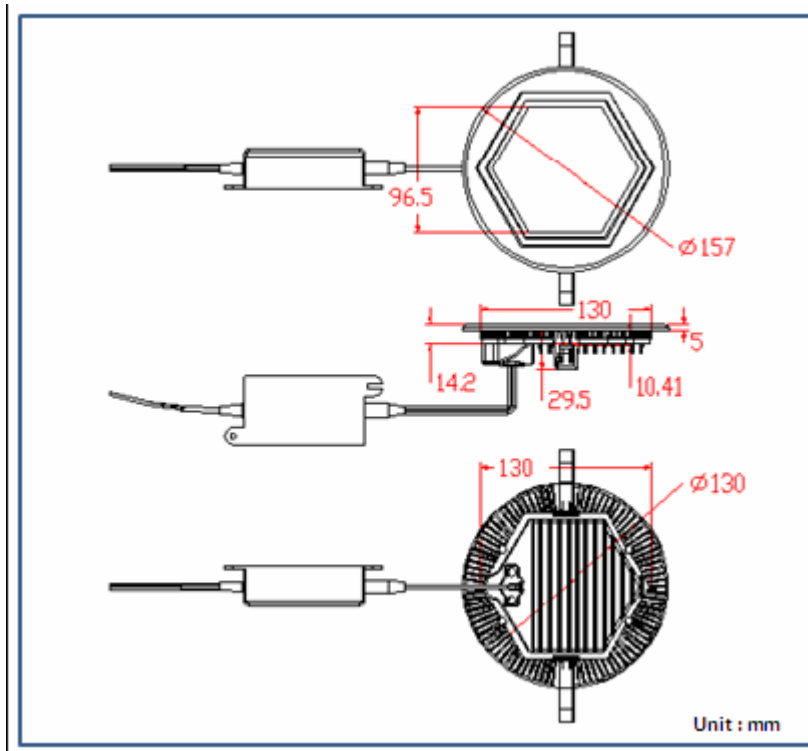

**Notes:**

All dimensions in mm tolerance is  $\pm 0.5$ mm unless otherwise noted.

**Copyright**

Copyright 2010, by ShenZhen Wayjun Technology Co.,Ltd. All rights are reserved. ShenZhen Wayjun Technology Co.,Ltd reserves the right to make improvements to the products described in this manual at any time without notice.

**Trademark**

The names used for identification only may be registered trademarks of their respective companies.